




# AVK SWING CHECK VALVES WITH LEVER AND WEIGHT PRESSURE LOSS, DN50, DN65, DN80 AND DN100

Pressure loss - series 41 - weight positioned for fastest closing - DN50, DN65, DN80 and DN100

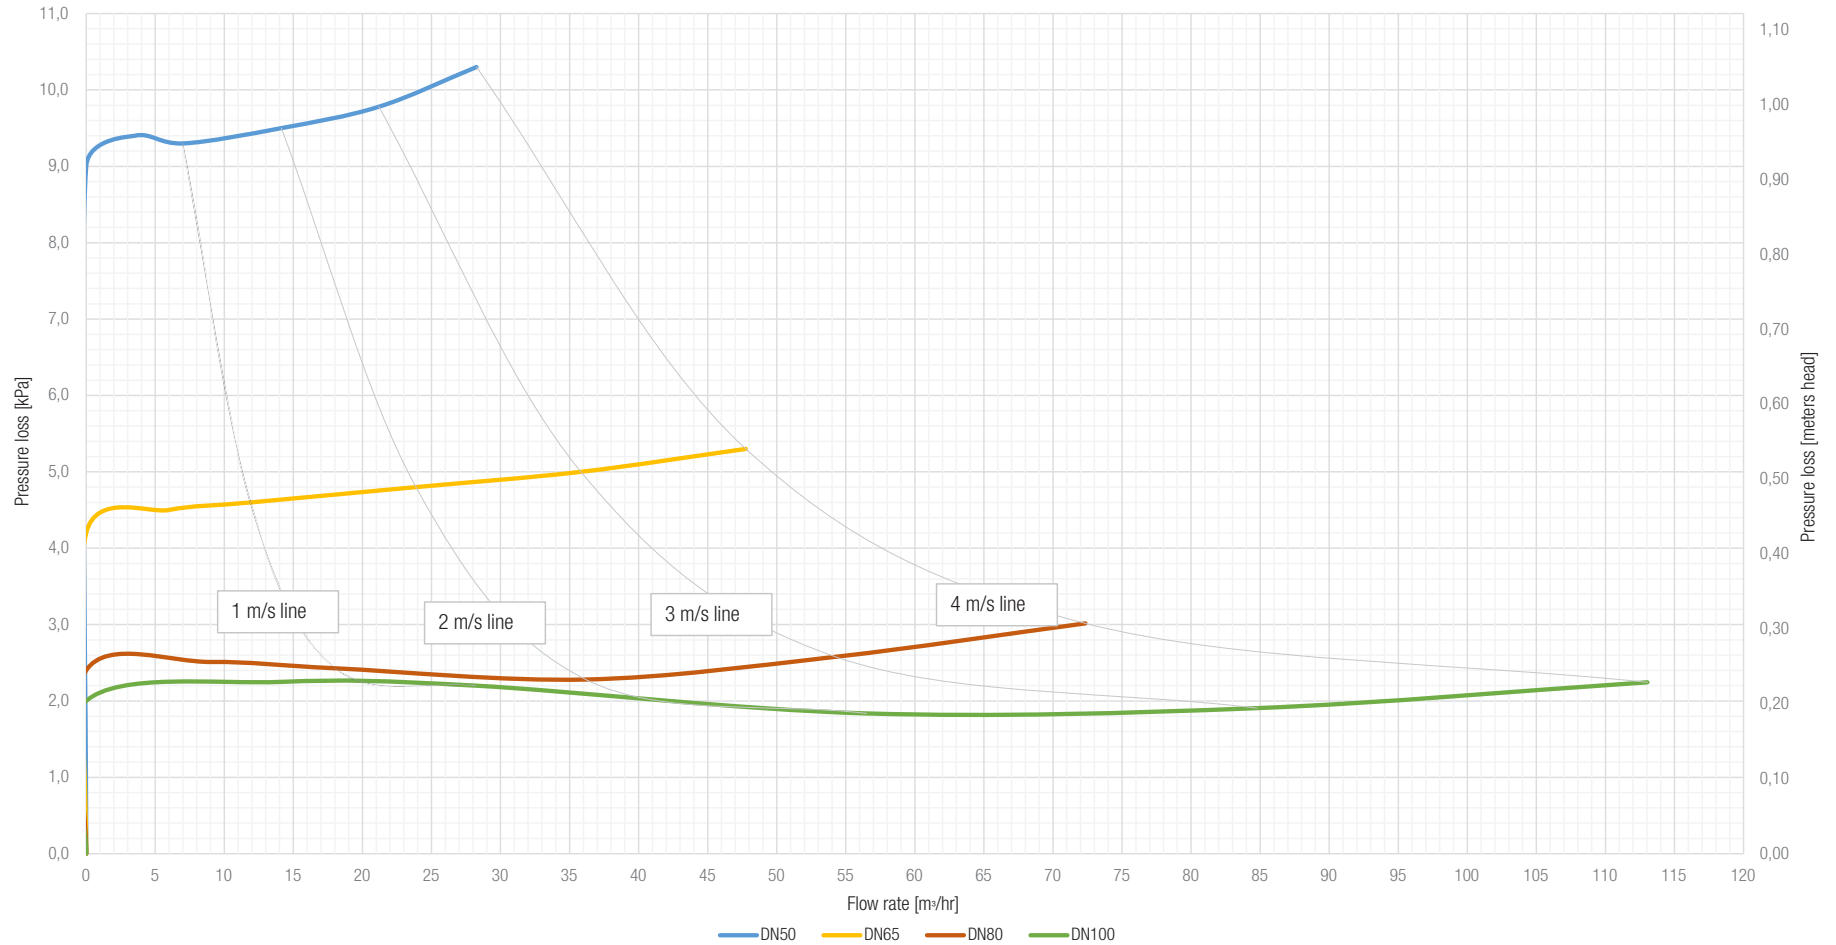

These curves are based on tests, performed according to EN1267, with a horizontal installation.

DN50, fully open check valve at approx. 7 m³/hr (0,99m/s) - DN65, fully open check valve at approx. 13 m³/hr - (1,09m/s) - DN80, fully open check valve at approx. 22m³/hr (1,22m/s) - DN100, fully open check valve at approx. 35 m³/hr (1,24m/s)

